




SNR BEARING CORP.OF AMERICA

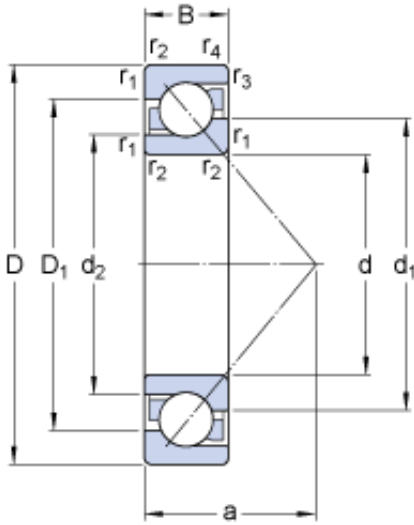

70 mm x 150 mm x 35 mm skf 7314 BEGAP Single row angular contact ball bearings

Bearing No. 7314 BEGAP

7314 BEGAP Bearing 2D drawings and 3D CAD models

Size	150x70x35 mm
Bore Diameter	150 mm
Outer Diameter	70 mm
Width	35 mm
d	70 mm
D	150 mm
B	35 mm
d ₁	101.1 mm
d ₂	84.4 mm
D ₁	121.5 mm
a	64 mm
r _{1,2} - min.	2.1 mm
r _{3,4} - min.	1.1 mm
d _a - min.	82 mm
D _a - max.	138 mm
D _b - max.	143 mm
r _a - max.	2 mm
r _b - max.	1 mm
Basic dynamic load rating - C	127 kN
Basic static load rating - C ₀	98 kN
Fatigue load limit - P _u	3.9 kN
Reference speed	5600 r/min
Limiting speed	5600 r/min
Calculation factor - k _r	0.1



SNR BEARING CORP.OF AMERICA

Calculation factor - k_a	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	2.55
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Preload	Light
Mounting Arrangement	Universal
Inch - Metric	Metric



SNR BEARING CORP.OF AMERICA

Long Description	70MM Bore; 150MM Outside Diameter; 35MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7314 BEGAP
Weight / LBS	5.613
Outside Diameter	5.906 Inch 150 Millimeter
Bore	2.756 Inch 70 Millimeter
Width	1.378 Inch 35 Millimeter
bore diameter:	70 mm
radial static load capacity:	98 kN
outside diameter:	150 mm
cage material:	Nylon
overall width:	35 mm
outer ring width:	35 mm
contact angle:	40 °
maximum rpm:	5600 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	2 mm
radial dynamic load capacity:	127 kN



SNR BEARING CORP.OF AMERICA

series:	73
d_1	101.1 mm
d_2	84.4 mm
D_1	121.5 mm
$r_{1,2}$ min.	2.1 mm
$r_{3,4}$ min.	1.1 mm
d_a min.	82 mm
D_a max.	138 mm
D_b max.	143 mm
r_a max.	2 mm
r_b max.	1 mm
Basic dynamic load rating C	127 kN
Basic static load rating C_0	98 kN
Fatigue load limit P_u	3.9 kN
Calculation factor A	0.145
Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	2.65 kg