




# SNR BEARING CORP.OF AMERICA

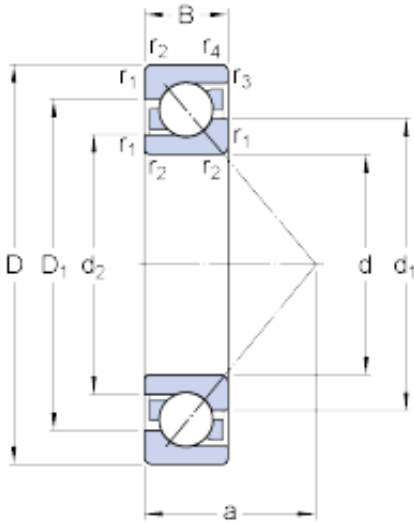

40 mm x 90 mm x 23 mm skf 7308 BECBP  
Single row angular contact ball bearings

Bearing No. 7308 BECBP

7308 BECBP Bearing 2D drawings and 3D CAD models

Size	90x40x23 mm
Bore Diameter	90 mm
Outer Diameter	40 mm
Width	23 mm
d	40 mm
D	90 mm
B	23 mm
d <sub>1</sub>	59.7 mm
d <sub>2</sub>	49.55 mm
D <sub>1</sub>	71.6 mm
a	39 mm
r <sub>1,2</sub> - min.	1.5 mm
r <sub>3,4</sub> - min.	1 mm
d <sub>a</sub> - min.	49 mm
D <sub>a</sub> - max.	81 mm
D <sub>b</sub> - max.	84.4 mm
r <sub>a</sub> - max.	1.5 mm
r <sub>b</sub> - max.	1 mm
Basic dynamic load rating - C	50 kN
Basic static load rating - C <sub>0</sub>	32.5 kN
Fatigue load limit - P <sub>u</sub>	1.4 kN
Reference speed	10000 r/min
Limiting speed	10000 r/min
Calculation factor - k <sub>r</sub>	0.1



## SNR BEARING CORP.OF AMERICA

Calculation factor - $k_a$	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - $Y_0$	0.52
Calculation factor - $Y_1$	0.55
Calculation factor - $Y_2$	0.93
Calculation factor - X	0.35
Calculation factor - $Y_0$	0.26
Calculation factor - $Y_1$	
Calculation factor - $Y_2$	0.57
Category	Angular Contact Ball Bearings
Inventory	14.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.61
EAN	7316577067821
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



## SNR BEARING CORP.OF AMERICA

Long Description	40MM Bore; 90MM Outside Diameter; 23MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7308 BECBP
Weight / LBS	1.347
Bore	1.575 Inch   40 Millimeter
Width	0.906 Inch   23 Millimeter
Outside Diameter	3.543 Inch   90 Millimeter
bore diameter:	40 mm
radial static load capacity:	32.5 kN
outside diameter:	90 mm
cage material:	Nylon
overall width:	23 mm
outer ring width:	23 mm
contact angle:	40 °
maximum rpm:	10000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	1.5 mm



## SNR BEARING CORP.OF AMERICA

radial dynamic load capacity:	50 kN
series:	73
$d_1$	59.7 mm
$d_2$	49.55 mm
$D_1$	71.6 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	1 mm
$d_a$ min.	49 mm
$D_a$ max.	81 mm
$D_b$ max.	84.4 mm
$r_a$ max.	1.5 mm
$r_b$ max.	1 mm
Basic dynamic load rating C	50 kN
Basic static load rating $C_0$	32.5 kN
Fatigue load limit $P_u$	1.37 kN
Calculation factor A	0.0173
Calculation factor $k_r$	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	0.62 kg