




# SNR BEARING CORP.OF AMERICA

28,575 mm x 57,15 mm x 17,462 mm NTN  
 4T-15590/15520 Single row tapered roller bearings

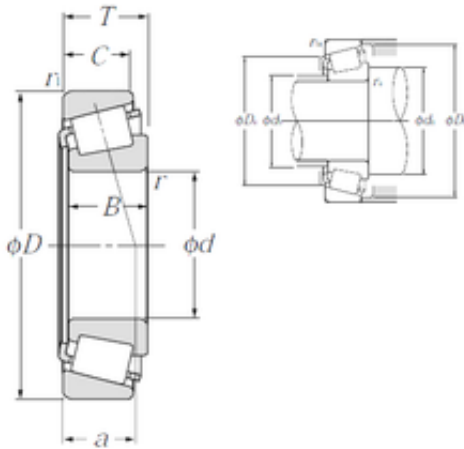

Bearing No. 4T-15590/15520

4T-15590/15520 Bearing 2D drawings and 3D CAD models

Size	28.575x57.15x17.462 mm
Bore Diameter	28,575 mm
Outer Diameter	57,15 mm
Width	17,462 mm
d	28,575 mm
D	57,15 mm
T	17,462 mm
B	17,462 mm
C	13,495 mm
ra1 max.	1,5 mm
a	5 mm
Da	51 mm
db	33,5 mm
ra max.	3,5 mm
da	39,5 mm
Db	53 mm
Weight	0,196 Kg
Basic dynamic load rating (C)	39,5 kN
Basic static load rating (C0)	45,5 kN
(Grease) Lubrication Speed	6 700 r/min
(Oil) Lubrication Speed	8 900 r/min
Calculation factor (e)	0,35
Calculation factor (Y0)	0,95
d1	42.5 mm
e	0.35



## SNR BEARING CORP.OF AMERICA

Y2	1.73
Y0	0.95
Mass	0.2 kg
Dynamic load, C	39.5 kN
Rating life coefficient, A2	1.4
Static load, C0	45.5 kN
Fatigue limit load, Cu	5.5 kN
Nlim (oil)	8,900 rpm
Nlim (grease)	6,700 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.24 Hz
Characteristic outer ring frequency, BPF0	7.2 Hz
Characteristic inner ring frequency, BPF1	9.8 Hz
ra max	3.5 mm
r1a max	1.5 mm